

2081737  
01-04-02



S/N 09/844879

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: Forssell Examiner: To be assigned

Serial No.: 09/844879 Group Art Unit: 2681

Filed: 4/27/01 Docket No.: 975.336USW1

Title: METHOD AND SYSTEM FOR RESTORING A SUBSCRIBER CONTEXT

<b>CERTIFICATE OF MAILING UNDER 37 C.F.R. 81.8</b>	
I hereby certify that this correspondence is being deposited with the United States Postal Service with sufficient postage as first class mail in an envelope addressed to: Assistant Commissioner for Patents, Washington, DC 20231 on <u>November 29, 2001</u> .	
<u>Michael B. Lasky</u> Name	 Signature

**RECEIVED**  
DEC 28 2001  
Technology Center 2600

Box  
Assistant Commissioner for Patents  
Washington, D.C. 20231

- ☒ Certified copy of EP Serial Number PCT/EP98/07109, filed 6 November 1998; Submission of Priority Document
- ☒ Transmittal Sheet
- ☒ Return postcard

Authorization is hereby given to charge any additional fees or credit any overpayments that may be deemed necessary to Deposit Account Number 50-1038.

Respectfully submitted,

Altera Law Group, LLC  
6500 City West Parkway – Suite 100  
Minneapolis, MN 55344-7701  
952-912-0527

Date: November 29, 2001

By:

Michael B. Lasky  
Reg. No. 29,555  
MBL/blj




09/844879

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant:	Forssell	Examiner:	To be assigned
Serial No.:	09/844879	Group Art Unit:	2681
Filed:	4/27/01	Docket No.:	975.336USW1
Title:	<u>METHOD AND SYSTEM FOR RESTORING A SUBSCRIBER CONTEXT</u>		

<b>CERTIFICATE OF MAILING UNDER 37 C.F.R. §1.8</b>	
I hereby certify that this correspondence is being deposited with the United States Postal Service with sufficient postage as first class mail in an envelope addressed to: Assistant Commissioner for Patents, Washington, DC 20231 on <u>November 29, 2001</u> .	
Michael B. Lasky	
Name	Signature

**RECEIVED**  
DEC 28 2001  
Technology Center 2600

**SUBMISSION OF PRIORITY DOCUMENT**

Box  
Assistant Commissioner for Patents  
Washington, D.C. 20231


Dear Sir:

Enclosed is a certified copy of EP application, Serial Number PCT/EP98/07109,  
filed 6 November 1998, the priority of which is claimed under 35 U.S.C. §120.

Respectfully submitted,

Altera Law Group, LLC  
6500 City West Parkway - Suite 100  
Minneapolis, MN 55344-7701  
952-912-0527

Date: November 29, 2001

By:   
Michael B. Lasky  
Reg. No. 29,555  
MBL/blj



**Bescheinigung**

**Certificate**

**Attestation**

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten internationalen Patentanmeldung überein.


The attached documents are exact copies of the international patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet international spécifiée à la page suivante.

Den Haag, den  
The Hague,  
La Haye, le

13 NOV 2001

Der Präsident des Europäischen Patentamts  
Im Auftrag  
For the President of the European Patent Office  
Le Président de l'Office européen des brevets  
p. o.

  
M. de Jong-de Koster

Patentanmeldung Nr.  
Patent application no. PCT/EP 98/07109  
Demande de brevet n°



**Anmeldung Nr.:** PCT/EP 98/07109  
**Application no.:**  
**Demande n°:**

**Anmelder:** 1. Nokia Telecommunications Oy - Nokia Group, Finland  
**Applicant(s):** 2. Forssell, Mika - Espoo, Finland  
**Demandeur(s):**

**Bezeichnung der Erfindung:**  
**Title of the invention:** Method and system for restoring a subscriber context  
**Titre de l'invention:**

**Anmeldetag:**  
**Date of filing:** 06 November 1998(06.11.98)  
**Date de dépôt:**

**In Anspruch genommene Priorität(en)**  
**Priority(ies) claimed**  
**Priorité(s) revendiquée(s)**

<b>Staat:</b>	<b>Tag:</b>	<b>Aktenzeichen:</b>
<b>State:</b>	<b>Date:</b>	<b>File no.</b>
<b>Pays:</b>	<b>Date:</b>	<b>Numéro de dépôt:</b>

**Benennung von Vertragsstaaten :** Siehe Formblatt PCT/RO/101 (beigefügt)  
**Designation of contracting states :** See Form PCT/RO/101 (enclosed)  
**Désignation d'états contractants :** Voir Formulaire PCT/RO/101 (ci-joint)

**Bemerkungen:**  
**Remarks:**  
**Remarques:**

Feld Nr. V BESTIMMUNG VON STAATEN

Die folgenden Bestimmungen nach Regel 4.9 Absatz a werden hiermit vorgenommen (bitte die entsprechenden Kästchen ankreuzen; wenigstens ein Kästchen muß angekreuzt werden):

Regionales Patent

- ☒ AP **ARIPO-Patent:** GH Ghana, GM Gambia, KE Kenia, LS Lesotho, MW Malawi, SD Sudan, SZ Swasiland, UG Uganda, ZW Simbabwe und jeder weitere Staat, der Vertragsstaat des Harare-Protokolls und des PCT ist
- ☒ EA **Eurasisches Patent:** AM Armenien, AZ Aserbaidschan, BY Belarus, KG Kirgisistan, KZ Kasachstan, MD Republik Moldau, RU Russische Föderation, TJ Tadschikistan, TM Turkmenistan und jeder weitere Staat, der Vertragsstaat des Eurasischen Patentübereinkommens und des PCT ist
- ☒ EP **Europäisches Patent:** AT Österreich, BE Belgien, CH und LI Schweiz und Liechtenstein, CY Zypern, DE Deutschland, DK Dänemark, ES Spanien, FI Finnland, FR Frankreich, GB Vereinigtes Königreich, GR Griechenland, IE Irland, IT Italien, LU Luxemburg, MC Monaco, NL Niederlande, PT Portugal, SE Schweden und jeder weitere Staat, der Vertragsstaat des Europäischen Patentübereinkommens und des PCT ist
- ☒ OA **OAPI-Patent:** BF Burkina Faso, BJ Benin, CF Zentralafrikanische Republik, CG Kongo, CI Côte d'Ivoire, CM Kamerun, GA Gabun, GN Guinea, ML Mali, MR Mauretanien, NE Niger, SN Senegal, TD Tschad, TG Togo und jeder weitere Staat, der Vertragsstaat der OAPI und des PCT ist (falls eine andere Schutzrechtsart oder ein sonstiges Verfahren gewünscht wird, bitte auf der gepunkteten Linie angeben) *+ GW*

Nationales Patent (falls eine andere Schutzrechtsart oder ein sonstiges Verfahren gewünscht wird, bitte auf der gepunkteten Linie angeben):

- |   |  |
|---|--|
| <input checked="" type="checkbox"/> AL Albanien                               | <input checked="" type="checkbox"/> LS Lesotho   |
| <input checked="" type="checkbox"/> AM Armenien                               | <input checked="" type="checkbox"/> LT Litauen   |
| <input checked="" type="checkbox"/> AT Österreich                             | <input checked="" type="checkbox"/> LU Luxemburg                                       |
| <input checked="" type="checkbox"/> AU Australien                             | <input checked="" type="checkbox"/> LV Lettland  |
| <input checked="" type="checkbox"/> AZ Aserbaidschan                          | <input checked="" type="checkbox"/> MD Republik Moldau                                 |
| <input checked="" type="checkbox"/> BA Bosnien-Herzegowina                    | <input checked="" type="checkbox"/> MG Madagaskar                                      |
| <input checked="" type="checkbox"/> BB Barbados                               | <input checked="" type="checkbox"/> MK Die ehemalige jugoslawische Republik Mazedonien |
| <input checked="" type="checkbox"/> BG Bulgarien                              | <input checked="" type="checkbox"/> MN Mongolei  |
| <input checked="" type="checkbox"/> BR Brasilien                              | <input checked="" type="checkbox"/> MW Malawi  |
| <input checked="" type="checkbox"/> BY Belarus                                | <input checked="" type="checkbox"/> MX Mexiko  |
| <input checked="" type="checkbox"/> CA Kanada                                 | <input checked="" type="checkbox"/> NO Norwegen  |
| <input checked="" type="checkbox"/> CH und LI Schweiz und Liechtenstein       | <input checked="" type="checkbox"/> NZ Neuseeland                                      |
| <input checked="" type="checkbox"/> CN China                                  | <input checked="" type="checkbox"/> PL Polen   |
| <input checked="" type="checkbox"/> CU Kuba                                   | <input checked="" type="checkbox"/> PT Portugal  |
| <input checked="" type="checkbox"/> CZ Tschechische Republik                  | <input checked="" type="checkbox"/> RO Rumänien  |
| <input checked="" type="checkbox"/> DE Deutschland                            | <input checked="" type="checkbox"/> RU Russische Föderation                            |
| <input checked="" type="checkbox"/> DK Dänemark                               | <input checked="" type="checkbox"/> SD Sudan   |
| <input checked="" type="checkbox"/> EE Estland                                | <input checked="" type="checkbox"/> SE Schweden  |
| <input checked="" type="checkbox"/> ES Spanien                                | <input checked="" type="checkbox"/> SG Singapur  |
| <input checked="" type="checkbox"/> FI Finnland                               | <input checked="" type="checkbox"/> SI Slowenien                                       |
| <input checked="" type="checkbox"/> GB Vereinigtes Königreich                 | <input checked="" type="checkbox"/> SK Slowakei  |
| <input checked="" type="checkbox"/> GE Georgien                               | <input checked="" type="checkbox"/> SL Sierra Leone                                    |
| <input checked="" type="checkbox"/> GH Ghana                                  | <input checked="" type="checkbox"/> TJ Tadschikistan                                   |
| <input checked="" type="checkbox"/> GM Gambia                                 | <input checked="" type="checkbox"/> TM Turkmenistan                                    |
| <input checked="" type="checkbox"/> <del>GW Guinea-Bissau (OAPI-Patent)</del> | <input checked="" type="checkbox"/> TR Türkei  |
| <input checked="" type="checkbox"/> HR Kroatien                               | <input checked="" type="checkbox"/> TT Trinidad und Tobago                             |
| <input checked="" type="checkbox"/> HU Ungarn                                 | <input checked="" type="checkbox"/> UA Ukraine   |
| <input checked="" type="checkbox"/> ID Indonesien                             | <input checked="" type="checkbox"/> UG Uganda  |
| <input checked="" type="checkbox"/> IL Israel                                 | <input checked="" type="checkbox"/> US Vereinigte Staaten von Amerika                  |
| <input checked="" type="checkbox"/> IS Island                                 |  |
| <input checked="" type="checkbox"/> JP Japan                                  |  |
| <input checked="" type="checkbox"/> KE Kenia                                  | <input checked="" type="checkbox"/> UZ Usbekistan                                      |
| <input checked="" type="checkbox"/> KG Kirgisistan                            | <input checked="" type="checkbox"/> VN Vietnam   |
| <input checked="" type="checkbox"/> KP Demokratische Volksrepublik Korea      | <input checked="" type="checkbox"/> YU Jugoslawien                                     |
|   | <input checked="" type="checkbox"/> ZW Simbabwe  |
| <input checked="" type="checkbox"/> KR Republik Korea                         |  |
| <input checked="" type="checkbox"/> KZ Kasachstan                             |  |
| <input checked="" type="checkbox"/> LC Saint Lucia                            |  |
| <input checked="" type="checkbox"/> LK Sri Lanka                              | <input checked="" type="checkbox"/> GD Grenada   |
| <input checked="" type="checkbox"/> LR Liberia                                | <input type="checkbox"/>   |

Kästchen für die Bestimmung von Staaten (für die Zwecke eines nationalen Patents), die dem PCT nach der Veröffentlichung dieses Formblatts beigetreten sind:

Erklärung bzgl. vorsorglicher Bestimmungen: Zusätzlich zu den oben genannten Bestimmungen nimmt der Anmelder nach Regel 4.9 Absatz b auch alle anderen nach dem PCT zulässigen Bestimmungen vor mit Ausnahme der im Zusatzfeld genannten Bestimmungen, die von dieser Erklärung ausgenommen sind. Der Anmelder erklärt, daß diese zusätzlichen Bestimmungen unter dem Vorbehalt einer Bestätigung stehen und jede zusätzliche Bestimmung, die vor Ablauf von 15 Monaten ab dem Prioritätsdatum nicht bestätigt wurde, nach Ablauf dieser Frist als vom Anmelder zurückgenommen gilt. (Die Bestätigung einer Bestimmung erfolgt durch die Einreichung einer Mitteilung, in der diese Bestimmung angegeben wird, und die Zahlung der Bestimmungs- und der Bestätigungsgebühr. Die Bestätigung muß beim Anmeldeamt innerhalb der Frist von 15 Monaten eingehen.)

**Method and system for restoring a subscriber context**

5

FIELD OF THE INVENTION

10 The present invention relates to a method and system for restoring a subscriber context in a network element such as a GPRS Support Node (GSN) of a mobile communication system such as the GPRS (General Packet Radio Service).

15

BACKGROUND OF THE INVENTION

Network elements such as a Serving GPRS Support Node (SGSN) and a Gateway GPRS Support Node (GGSN) of the GPRS usually send to each other echo request messages so as to poll that  
20 the other GSN, i.e. SGSN or GGSN, is alive.

A GSN receiving an echo request message responds with an echo response message which contains a restart counter value as a parameter. The GSN which receives the echo  
25 response message compares the received restart counter value with a previous restart counter value stored for that particular peer GSN.

If the previously stored restart counter value differs from  
30 the restart counter value received in the echo response message, the GSN that sent the echo response message is considered by the GSN that received the echo response message as being restarted. The received new restart counter value is stored by the receiving GSN, replacing the  
35 value previously stored for the sending GSN. Subsequently, the GSN that received the echo response message with the

new (unexpected) restart counter value considers all subscriber contexts, i.e. Packet Data Protocol contexts (PDP contexts), relating to the sending GSN as inactive.

5 A VLR (Visitor Location Register) restart procedure is a similar procedure, wherein the VLR informs a HLR (Home Location Register) of the restart. When the VLR has been restarted, the complete set of subscriber information relevant to the VLR is transmitted to the VLR.

10

Fig. 1 shows a principle diagram indicating information transfers and processings of such an echoing procedure performed between two network elements NE1 and NE2. In Fig. 1, the processing starts at the top and moves to the bottom.

15

Initially, the network element NE2 transmits an echo request message to the network element NE1 which responds with an echo request response message including its restart counter value ( $N = n$ ). If the restart counter values of both network elements are equal, the NE2 assumes that no restart has been performed since the last echo request.

20

Thereafter, mobile stations (MS) of the mobile communication network activate new subscriber contexts to the network elements, such that new contexts are created in the NE1 and NE2. The NE1 is then restarted due to a failure or the like, and its restart counter is incremented. Subsequently, MSs activate further subscriber contexts which are created in the NE1 and NE2.

25

30

If the NE2 now transmits an echo request message to the NE1, the restart counter value received in the echo

response message differs from the value previously stored for the NE1. Accordingly, the NE2 assumes a restart of the NE1 and inactivates all subscriber contexts of the NE1, although some subscriber contexts were created after the restart of the NE1 and are thus still valid.

Thus, unnecessary subscriber context re-activations have to be performed and the downtime of the service is high.

10

#### SUMMARY OF THE INVENTION

15

It is therefore an object of the present invention to provide a method and system for restoring a subscriber context, wherein unnecessary subscriber context re-activations are prevented.

20

This object is achieved by a method for restoring a subscriber context in a network element of a mobile communication network, comprising the steps of:  
transmitting a restart information indicating whether a subscriber context has been updated after the latest restart,  
continuing the use of a subscriber context updated after the latest restart, and  
inactivating a subscriber context updated before the latest restart.

30

Additionally, the above object is achieved by a system for restoring a subscriber context in a network element of a mobile communication network, comprising:  
transmitting means for transmitting a restart information indicating whether a subscriber context has been updated after the latest restart to said network element,



wherein said network element comprises receiving means for receiving the restart information and control means for continuing the use of a subscriber context updated after said latest restart and for inactivating the subscriber context updated before the latest restart, in response to the restart information.

Accordingly, the new subscriber contexts which have been updated after the latest restart of the network element are indicated and the use of a new subscriber context received after the restart can be continued. Thus, the amount of unnecessary subscriber context re-activations and consequently also the downtime of the service are reduced. This has a positive effect on the quality observed by an end user.

Moreover, the amount of signaling required after the restart procedure is reduced, since a smaller number of subscriber contexts have to be re-established.

Preferably, the restart information may be a restart counter value which is transmitted with a context signaling message. Thereby, the restart information is received very fast such that resources reserved for the effected subscriber contexts can be freed immediately and used when activating other subscriber contexts.

The restart counter value may be compared with a stored restart counter value so as to determine the subscriber context updated before the latest restart. In this case, the stored restart counter value can be updated on the basis of the transmitted restart counter value.

The transmission of the restart information may be performed conditionally, e.g. only one time after the latest restart. Thereby, signaling processing can be minimized.

5

The network element may be a GPRS support node, wherein the restart information is transmitted together with a tunnel management signaling message. In this case, the subscriber context may be a PDP context.

10

Furthermore, the network element may comprise a comparing means for comparing a restart number transmitted as said restart information with a restart number stored in a storing means and for supplying the comparing result to a control means for inactivating a subscriber context updated before the latest restart, in response to said restart number. The control means may perform control so as to store a new subscriber context included in the subscriber context message and to delete an old subscriber context stored in the network element.

15

20

#### BRIEF DESCRIPTION OF THE DRAWINGS

In the following, the present invention will be described in greater detail on the basis of a preferred embodiment with reference to the accompanying drawings, in which:

25

Fig. 1 shows an information transfer and processing diagram of a known echoing procedure performed between network elements,

30

Fig. 2 shows an information transfer and processing diagram of a restoring method according to the preferred embodiment of the present invention,

5 Fig. 3 shows a principle block diagram of a transmitting network element and a receiving network element of a restoring system according to the preferred embodiment of the present invention,

10 Fig. 4 shows a block diagram of a GPRS network in which a restoring method and system according to the preferred embodiment of the present invention is implemented, and

Fig. 5 shows an information transfer and processing diagram  
15 of a PDP context restoring method according to the preferred embodiment of the present invention.

#### DESCRIPTION OF THE PREFERRED EMBODIMENT

20 In the following a restoring method according to the preferred embodiment of the present invention will be described on the basis of Fig. 2.

Fig. 2 shows an information transfer and processing diagram  
25 indicating information transfers between and processings in the network elements NE1 and NE2. If an MS activates a subscriber context, a restart information such as a restart number ( $N = n$ ) indicating the last restart is transmitted to the respective other network element. In case a restart  
30 is performed at the NE1, its restart number is incremented and a new restart number, i.e.  $N = n + 1$ , is transmitted to the NE2, when a new subscriber context is activated at NE1.

Thus, by comparing the transmitted new restart number ( $N = n + 1$ ) with its stored previous restart number ( $N = n$ ), the NE2 may determine the new subscriber context received after the restart of the NE1. Accordingly, the NE2 is able to  
5 delete only the "old" subscriber contexts received before  
the restart of the NE1 and stores the new restart number  $N = n + 1$ .

Thus, the subscriber contexts can be separated into those  
10 received before the restart of a network element and those received after the restart thereof.

Fig. 3 shows a principle block diagram of a transmitting network element and a receiving network element of a system  
15 for restoring a subscriber context according to the preferred embodiment of the present invention.

According to Fig. 3, a transmitting network element 10 comprises a message generating means 11 for generating a  
20 subscriber context message used to create new subscriber contexts or to update addresses of subscriber contexts at the receiving network element 20. Furthermore, a restart control means 12 is provided which is arranged to increment a restart counter 13, when a restart operation of the  
25 transmitting network element 10 is performed.

The counter value of the restart counter 13 is added by an adding means 14 to the subscriber context message supplied from the message generating means 11. The subscriber  
30 context message and the added restart counter value are supplied to a transmitter 15 so as to be transmitted to the receiving network element 20.

At the receiving network element 20, a receiver 21 is provided for receiving the subscriber context message and the added counter value. The receiver 21 is arranged to supply the received information to a reading means 21 for  
-----5- reading the restart counter value and to supply the subscriber context included in the subscriber context message to a context memory 25. The reading means 21 supplies the read counter value to a comparing means 23 which compares the read restart counter value with a  
10 previous restart counter value stored in a storing means 22 and which supplies the comparison result to a control means 24.

If the comparison result indicates that the received  
15 restart counter value is identical with the stored previous restart counter value, the control means 24 activates the context memory 25 so as to store the subscriber context included in the subscriber context message.

20 On the other hand, if the comparison result indicates that the received restart counter value differs from the previous restart counter value, the control means 24 controls the context memory 25 so as to delete or inactivate those stored subscriber contexts which relate to  
25 the transmitting network element 10 and to store the subscriber context included in the received subscriber context message.

Accordingly, only those subscriber contexts received before  
30 the restart operation are deleted or inactivated in the receiving network element 20.

It is to be noted, that the restart counter value not necessarily has to be added to the restart control message. As an alternative, the adding means 14 could be replaced by a switching means used for switching the restart counter value from the restart counter 13 to the transmitter 15, so as to be transmitted separately or in a separate message to the receiving network element 20, wherein the control means 24 may then delete or inactivate the corresponding subscriber contexts received before the latest restart.

10

In the following a restoration procedure performed between an SGSN and a GGSN of a GPRS network is described on the basis of Figures 4 and 5.

15 Fig. 4 shows a principle block diagram of a GPRS system. According to Fig. 4, a mobile station (MS) 1 is radio-connected to a Base Transceiver Station (BTS) 2 which is connected to a Base Station Controller (BSC) 3. The BSC 3 is connected to a SGSN 4 which is connected to a GGSN 5.  
20 The SGSN 4 and the GGSN 5 constitute GPRS support nodes (GSN) which are the main elements of the GPRS.

The main functions of the GGSN 5 involve an interaction with an external data network 6. The GGSN 5 updates the location directory using routing information supplied by  
25 the SGSN 4 about a path of the MS 1 and routes external data network protocol packets to the SGSN 4 currently serving the MS 1. It also decapsulates and forwards external data network packets to the appropriate data network and handles  
30 the billing of data traffic.

The main functions of the SGSN 4 are to detect new MSs 1 of the GPRS in its service area, handle the process of

registering the new MSS along with the GPRS registers,  
send/receive data packets to/from the MS 1 and keep a  
record of the location of the MS 1 inside of its service  
area. The subscription information is stored in a GPRS  
5- register which acts as a data base from which the SGSN 4  
can ask whether a new MS 1 in its area is allowed to join  
the GPRS network.

According to the preferred embodiment, a recovery  
10 information element including a restart counter value is  
included in a tunnel management signaling message sent  
between the SGSN 4 and the GGSN. Such a tunnel management  
signaling message can be used to control the PDP contexts  
in the GGSN 5. Each PDP context relates to mobile  
15 subscriber such as the MS 1.

According to the GPRS, tunnel management signaling messages  
include the messages Create PDP Context Request, Create PDP  
Context Response, Create AA PDP Context Request, Create AA  
20 PDP Context Response, Update PDP Context Request, Update  
PDP Context Response, Delete PDP Context Request, Delete  
PDP Context Response, Delete AA PDP Context Request, Delete  
AA PDP Context Response, Error Indication, PDU Notification  
Reject Request and PDU Notification Reject Response.

25 The recovery information element may also be conditional,  
i.e. it could be incorporated into the tunnel management  
signaling messages only if a GSN has been restarted and the  
GSN sends a signaling message to another GSN for the first  
30 time after restart. The GSN receiving the tunnel management  
signaling message is thus able to react on the  
corresponding restart as soon as possible, thus avoiding  
unnecessary inactivation of PDP contexts.

The PDU Notification Request and PDU Notification Response messages are also part of the tunnel management signaling messages, but they need not include the recovery

information element, because the PDU Notification Request causes the SGSN 4 to send either a Create (AA) PDP Context Request or a PDU Notification Reject Request message to the GGSN 5.

10 According to a minimal implementation, a recovery information element including the restart counter value is only incorporated into the messages Create (AA) PDP Context Request, Create (AA) PDP Context Response, Update PDP Context Request and Update PDP Context Response, because  
15 they are used to create new PDP contexts or to update an SGSN address of a PDP context in the GGSN 5.

In the following an example for a GPRS restoring method according to the preferred embodiment of the present  
20 invention is described with reference to Fig. 5.

Fig. 5 shows an information transfer and processing diagram indicating a restoring procedure performed between the SGSN 4 and the GGSN 5 based on a Create PDP Context Request  
25 message and a Create PDP Context Response message.

The SGSN 4 sends a Create PDP Context Request message to the GGSN 5, wherein the request message includes a restart counter value of the SGSN 4. If the restart counter value  
30 is the same as the GGSN 5 had previously stored for the SGSN 4, the GGSN creates the new PDP context in a normal manner. After having created the corresponding PDP context the GGSN 5 transmits a Create PDP Context Response message



including the restart counter value of the GGSN 5 to the SGSN 4. If the restart counter value is the same as the SGSN 4 had previously stored for the GGSN 5, the SGSN 4 operates normally.

5

Now, it is assumed that a restart operation is performed in the SGSN 4 and the restart counter value of the SGSN 4 is incremented accordingly. Thus, if the SGSN 4 transmits a Create PDP Context Request message to the GGSN 5, the restart counter value differs from the value stored previously for the SGSN 4. Due to this, the GGSN 5 inactivates all PDP contexts using the SGSN 4 and creates the new PDP context included in the Create PDP Context message in a normal manner. After creating the corresponding PDP context, the GGSN 5 transmits a Create PDP Context Response message including its restart counter value to the SGSN 4. If the restart counter value is the same as the SGSN 4 had previously stored for the GGSN 5, the SGSN 4 operates normally. If the restart counter value differs from the value stored previously for the GGSN 5, the SGSN 4 inactivates all other PDP contexts using the GGSN 5, except for the one being created.

Thus, if a GSN is restarted, only PDP context that were activated before the restart and that use the restarted GSN are inactivated. Since the GSN receives the restart information as quickly as possible, resources reserved for the affected PDP contexts can be freed immediately.

It is to be pointed out, that the restoring method and system described in preferred embodiment can be used in connection with any mobile communication network where subscriber contexts are restored between network elements.

The above description of the preferred embodiment and the accompanying drawings are only intended to illustrate the present invention. The preferred embodiment of the invention may vary within the scope of the attached claims.

5

In summary, a method and system for restoring a subscriber context in a network element of a mobile communication network is described, wherein a new subscriber context which has been updated after the latest restart is indicated by transmitting a corresponding restart information to the network element. Based on the restart information the network element continues the use of new subscriber contexts updated after the latest restart and inactivates old subscriber contexts updated before the latest restart. Thereby, the amount of unnecessary subscriber context re-activations and corresponding downtime of the service is reduced. Moreover, the amount of signaling required after the restart is reduced, since a smaller number of subscriber contexts have to be re-established.

10

15

20

**Claims:**

- 5 1. A method for restoring a subscriber context in a network  
element of a mobile communication network, comprising the  
steps of:
- 10 a) transmitting a restart information indicating whether a  
subscriber context has been updated after the latest  
restart;
- b) continuing the use of a subscriber context updated after  
said latest restart; and
- c) inactivating a subscriber context updated before the  
latest restart.
- 15 2. A method according to claim 1, wherein said restart  
information is a restart counter value and is transmitted  
together with a context signaling message.
- 20 3. A method according to claim 2, wherein said restart  
counter value is compared with a stored restart counter  
value so as to determine said subscriber context updated  
before the latest restart.
- 25 4. A method according to claim 3, wherein said stored  
restart counter value is updated on the basis of said  
transmitted restart counter value.
- 30 5. A method according to any one of claims 1 to 4, wherein  
said restart information is transmitted only one time after  
said latest restart.

6. A method according to any one of claims 1 to 5, wherein said network element is GPRS support node, and wherein said restart information is transmitted together with a tunnel management signaling message.

5 7. A method according to claim 6, wherein said subscriber context is a PDP context.

10 8. A system for restoring a subscriber context in a network element (20) of a mobile communication network, comprising:

a) transmitting means (10) for transmitting to said network element (20) a restart information indicating whether a subscriber context has been updated after the latest restart;

15 b) wherein said network element (20) comprises receiving means (21) for receiving said restart information, and control means (24) for continuing the use of a subscriber context updated after said latest restart and for  
20 inactivation a subscriber context updated before said latest restart, in response to said restart information.

9. A system according to claim 8, wherein said transmitting means (10) comprises a restart counter (13) for counting a restart number, and an adding means (14) for adding said  
25 restart number to a subscriber context message, and wherein said network element (20) comprises a comparing means (23) for comparing said restart number with a restart number stored in a storing means (22) and for supplying the  
30 comparing result to said control means (24).

10. A system according to claim 9, wherein said control means (24) performs control so as to store a new subscriber context included in said subscriber context message and to

delete an old subscriber context stored in said network element (20).

11. A system according to any one of claims 8 to 10,  
-----5----- wherein said network element is a GPRS support node (4,5) -----  
and wherein said subscriber context is a PDP context.

12. A network element (10) for a mobile communication  
network, comprising transmitting means (15) for  
10 transmitting a restart information indicating whether a  
subscriber context has been updated after the latest  
restart.

13. A network element according to claim 12, further  
15 comprising a restart counter (13) for counting a restart  
number, and adding means (14) for adding said restart  
number to a subscriber context message.

14. A network element (20) for a mobile communication  
20 network, comprising:  
a) receiving means (21) for receiving a restart information  
indicating whether a subscriber context has been updated  
after the latest restart, and  
b) control means (24) for continuing the use of a subscriber  
25 context updated after said latest restart and for  
inactivating a subscriber context updated before said  
latest restart in response to said restart information.


15. A network element according to claim 14, wherein said  
30 restart information is a restart number and wherein said  
network element (20) comprises comparing means (23) for  
comparing said restart number with a restart number stored

in a storing means (22) and for supplying the comparing result to said control means (24).


16. A network element according to any one of claims 12 to 15, wherein said network element is a GPRS support node (4,5) and wherein said subscriber context is a PDP context.

**Abstract:**

5 A method and system for restoring a subscriber context in a  
network element of a mobile communication network is  
described, wherein a new subscriber context which has been  
updated after the latest restart is indicated by  
transmitting a corresponding restart information to the  
10 network element. Based on the restart information the  
network element continues the use of new subscriber  
contexts updated after the latest restart and inactivates  
old subscriber contexts updated before the latest restart.  
Thereby, the amount of unnecessary subscriber context re-  
15 activations and the corresponding downtime of the service  
is reduced. Moreover, the amount of signaling required  
after the restart is reduced, since a smaller number of  
subscriber contexts have to be re-established.  
(Fig. 2)


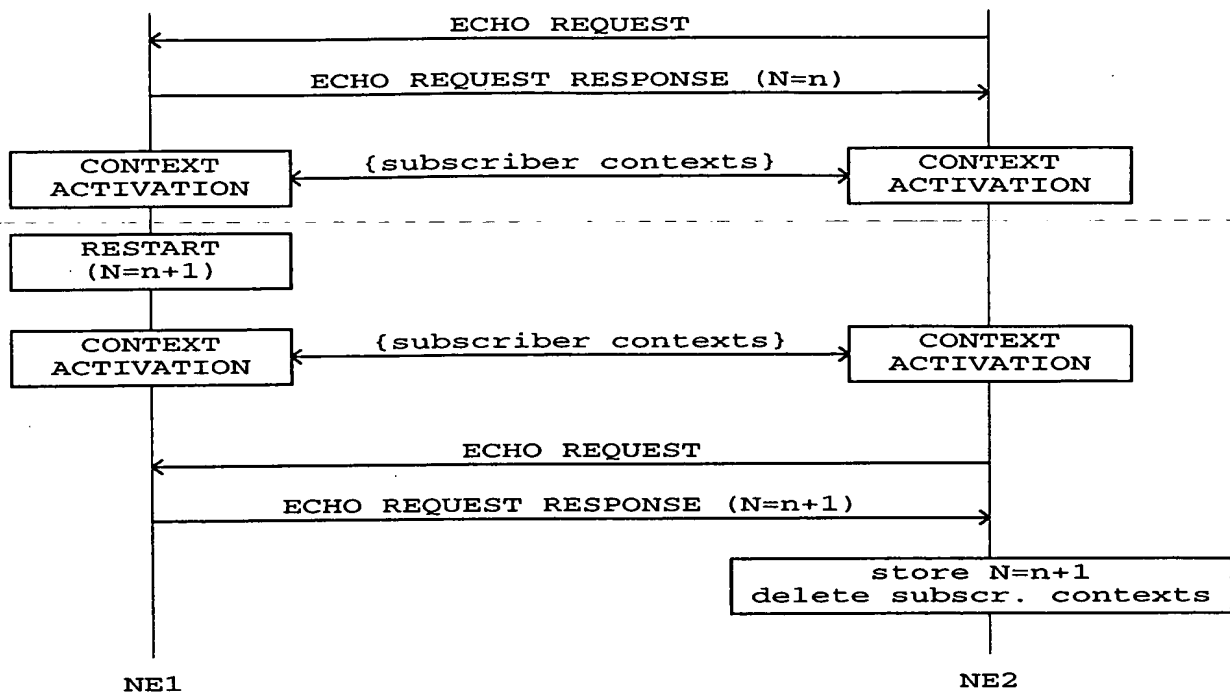



(prior art)  
**Fig. 1**

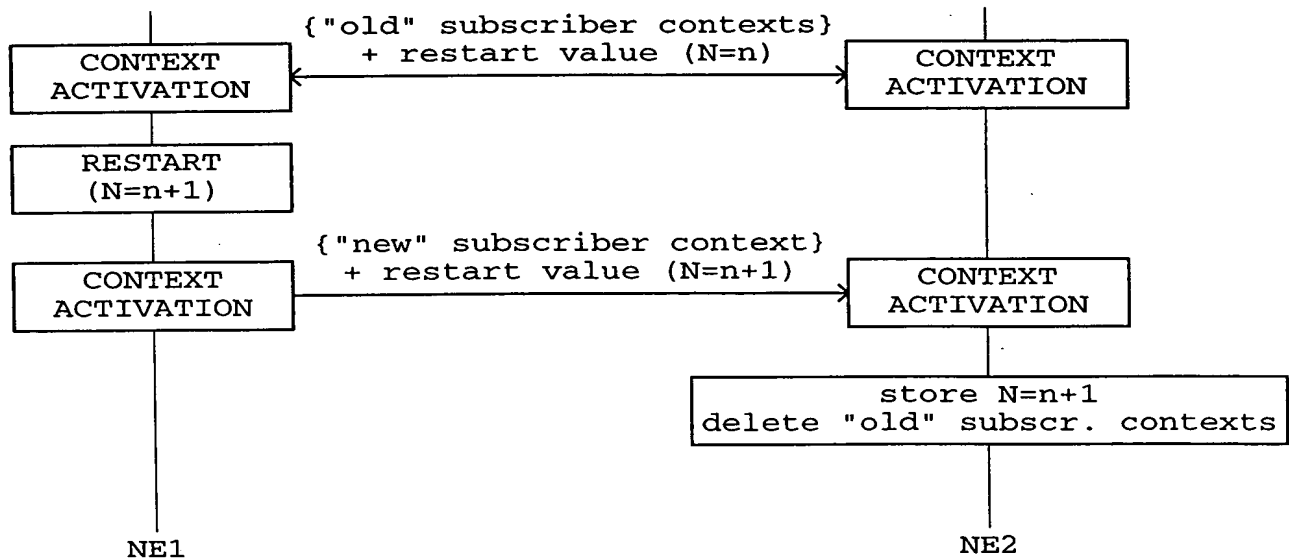

**Fig. 2**

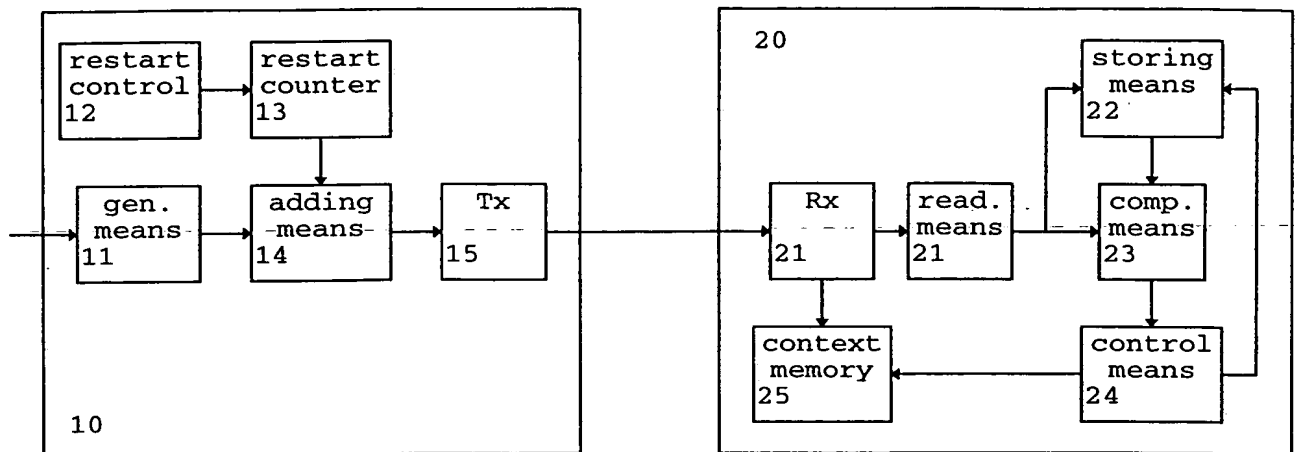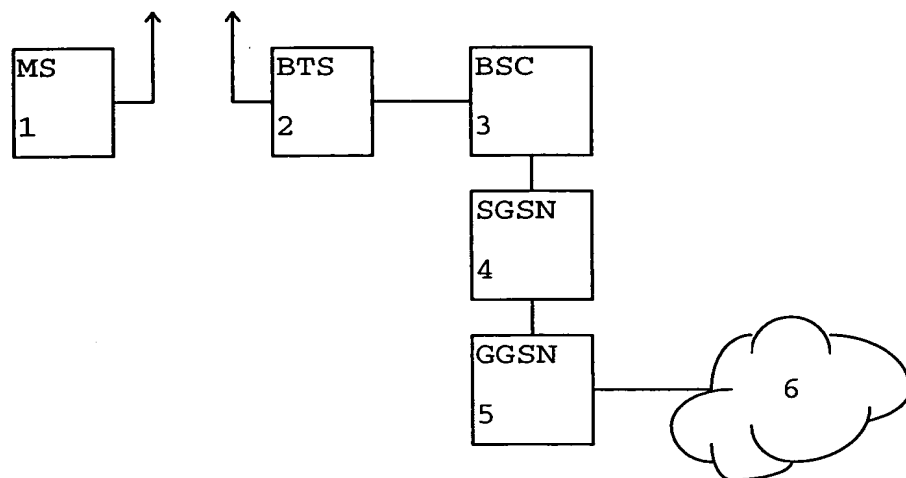

**Fig. 3****Fig. 4**

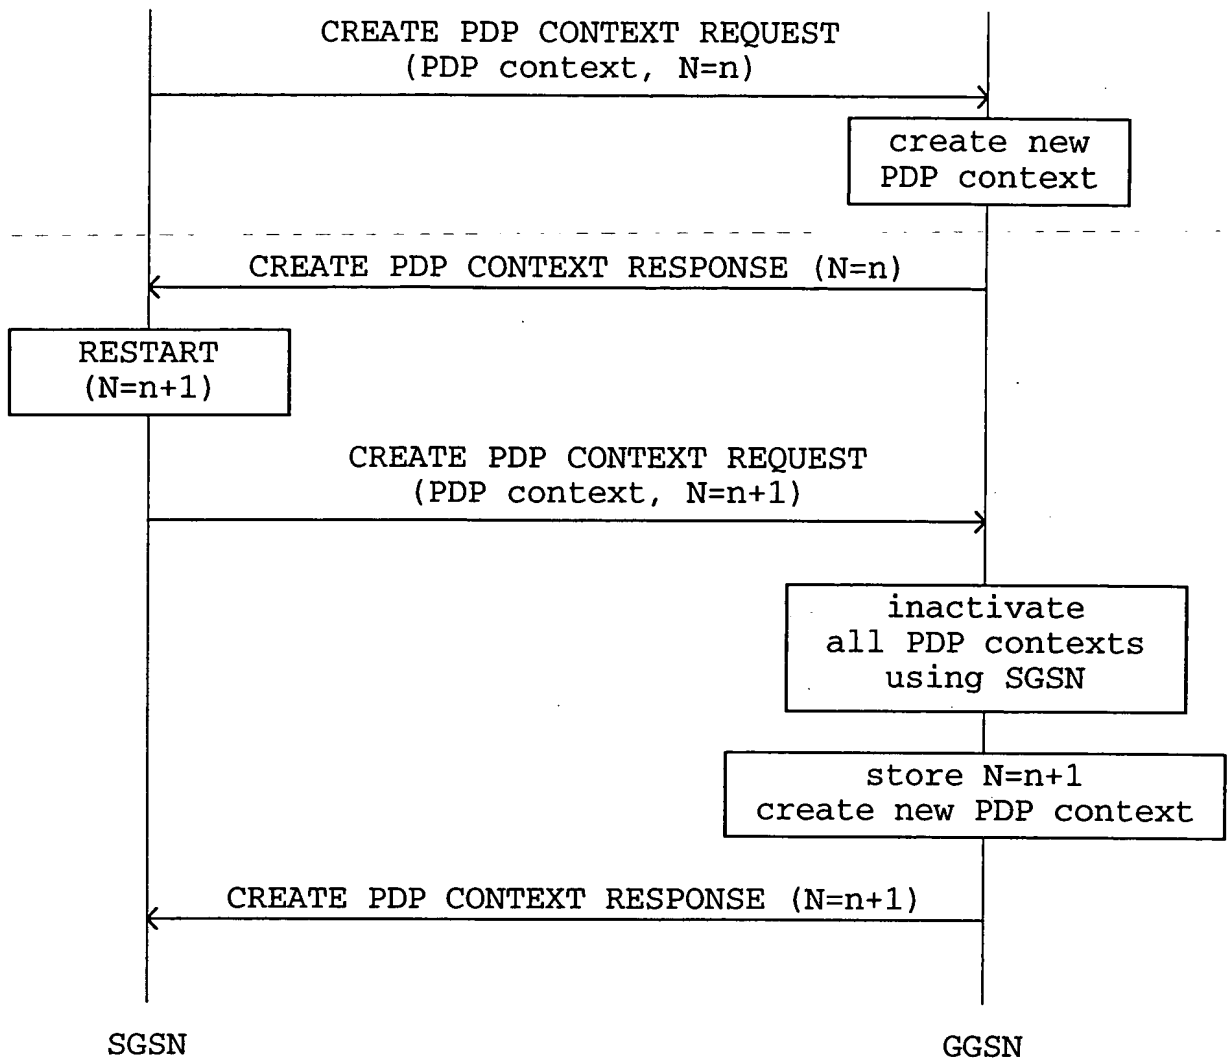**Fig. 5**